




**ASHBURN
AULT COMPANY, Inc.**
18 Washburn Way
Hinsdale, NH 03451

Precast Concrete • Redi Mix

NOTES:

- *Tank design specifications conform to ASTM C913 and C1227
- *Reinforcing Steel Deformed bars conform to latest ASTM specification A615.
- *Concrete compressive strength 5000 PSI at 28 days.
- *Method of manufacture: Wet Cast
- *Section is Monolithic
- *Pipe inlet and outlets have poly IV seals.

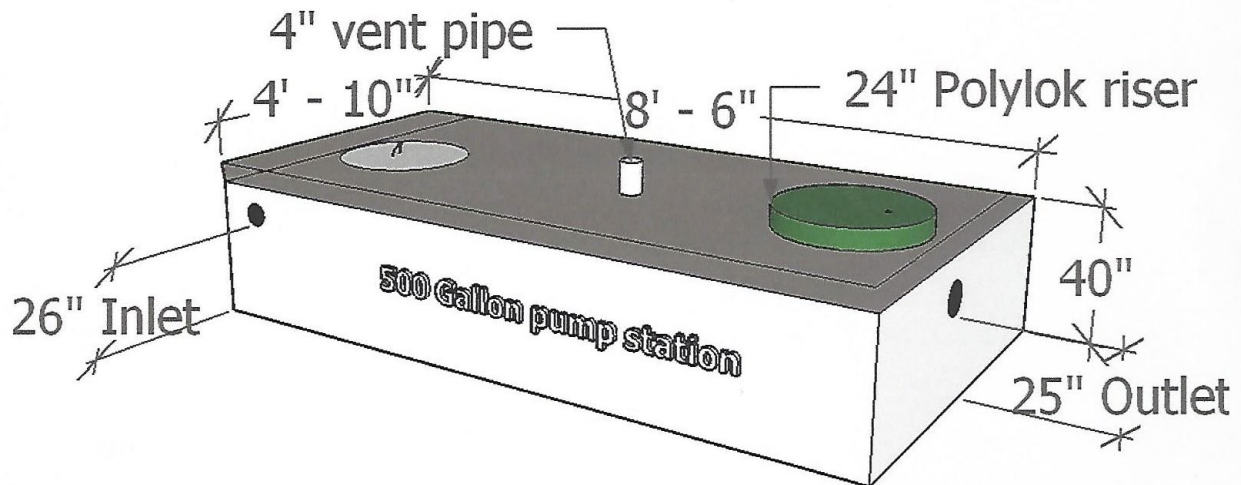

500 GALLON PUMP STATION

Phone: 603-256-6891

WEIGHT: 6,500 LBS.

E-MAIL: WASHBURNVAULT@YAHOO.COM

DATE: 1/1/2017