
NOTES:

- *Reinforcing Steel Deformed bars conform to latest ASTM specification A615.
- * Concrete compressive strength 5000 PSI at 28 days.
- *Method of manufacture: Wet Cast
- *Section is Monolithic
- *Pipe inlet and outlets have Polylok pipe seals
- *Design load: AASHTO H-20
- *Tank design specifications conform to ASTMC913 and C1227
- *Joint sealant conforms to latest AASHTO specification M-198.

DATE: 1/1/2017

* Made to job specifics

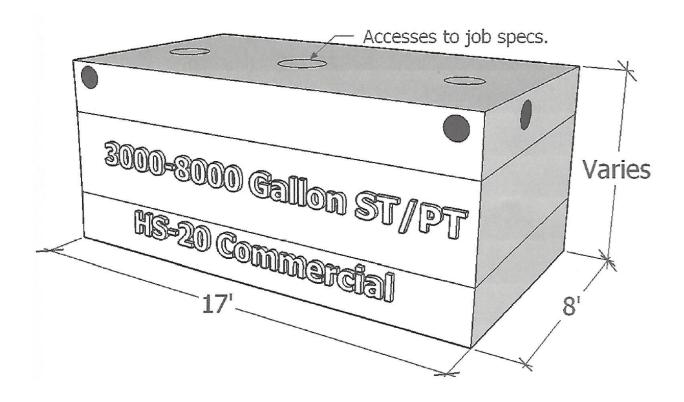

3000-8000 GALLON ST/PT

Phone: 603-256-6891

E-MAIL: WASHBURNVAULT@YAHOO.COM

WEIGHT: Varies.